

PowerBank Rechargeable Batteries





P.5



P.7

GP PowerBank
Standard Series

P.13



GP Rechargeable
Batteries

GP PowerBank Premium Series

P.1

GP PowerBank Mid-Range Series



GP PowerBank Specialty Series



P.15

Premium Series

U-Smart



30
MINS



- The fastest charger on the market
- Patented charging technology
- Individual smart charging channels allow charging batteries of different capacities and different states of charge at the same time without any safety concerns
- 12V DC car charging function
- AC100-240V for worldwide use
- 30 minutes to fully charge 1 to 4 pieces of batteries
- Ultra-high capacity
- Charge 1 to 4 pieces of NiMH AA or AAA
- Individual safety termination
 - * 4 x minus delta voltage (-dV)
 - * 4 x temperature sensor
 - * 4 x safety timer
- Trickle charge after full charge
- Damaged battery detection
- Alkaline and other primary batteries detection
- 4 x dual color LED indicator
- Safety guaranteed
- Environmentally friendlier



4 x 2300 series AA
with car cord



4 x 2100 series AA
with car cord



4 x 2300 series AA



4 x 2100 series AA

More models are available: 4 x 2000 series AA with / without car cord.

Smart 2



- 1-hour fast charger
- Patented charging technology
- Individual smart charging channels allow charging batteries of different capacities and different states of charge at the same time without any safety concerns
- 12V DC car charging function
- AC100-240V for worldwide use
- 1 hour to fully charge 1 to 4 pieces of batteries
- Ultra-high capacity
- Charge 1 to 4 pieces of NiMH / NiCd AA or AAA
- Individual safety termination
 - * 4 x minus delta voltage (-dV)
 - * 4 x temperature sensor
 - * 4 x safety timer
- Trickle charge after full charge
- Damaged battery detection
- Alkaline and other primary batteries detection
- 4 x LED indicator
- Safety guaranteed
- Environmentally friendlier



4 x 2300 series AA
with car cord



4 x 2100 series AA
with car cord



4 x 2300 series AA



4 x 2100 series AA



4 x 800 mAh AAA

More models are available: 4 x 2000 series AA with / without car cord, 4 x 1800 mAh AA with / without car cord.

Premium Series Travel



- 2-hour fast charger
- Individual smart charging channels allow charging batteries of different capacities and different states of charge at the same time without any safety concerns
- 12V DC car charging function
- AC100-240V for worldwide use
- 2 hours to fully charge 2 pieces of batteries
- 5 hours to fully charge 4 pieces of batteries
- Ultra-high capacity
- Charge 1 to 4 pieces of NiMH AA or 1 to 2 pieces of NiMH AAA
- Safety termination
 - * Individual minus delta voltage (-dV)
 - * Temperature sensor
 - * Individual safety timer
- Trickle charge after full charge
- Damaged battery detection
- Alkaline and other primary batteries detection
- 1 x dual color LED indicator
- Safety guaranteed
- Environmentally friendlier



4 x 2300 series AA
with car cord



4 x 2100 series AA
with car cord



4 x 2300 series AA



4 x 2100 series AA



4 x 2000 series AA

More models are available: 4 x 2000 series AA with car cord, 4 x 1800 mAh AA with / without car cord.

Rapid 2



- 2-hour fast charger
- -dV termination
- Safety timer
- AC100-240V for worldwide use

- 2 hours to fully charge 2 pieces of batteries
- 5 hours to fully charge 4 pieces of batteries
- Ultra-high capacity
- Charge 2 or 4 pieces of NiMH AA or 2 pieces of NiMH AAA
- Safety termination
 - * Minus delta voltage (-dV)
 - * Temperature sensor
 - * Safety timer
- Trickle charge after full charge
- Damaged battery detection
- Alkaline and other primary batteries detection
- 1 x dual color LED indicator
- Safety guaranteed
- Environmentally friendlier



4 x 2300 series AA



4 x 2100 series AA



4 x 2000 series AA



4 x 1800 mAh AA



4 x 1600 mAh AA

Mid-Range Series

Quick 2



- 6-hour quick charger
- Slim and compact
- Safety timer
- AC100-240V for worldwide use
- 6 hours to fully charge 2 or 4 pieces of batteries
- Ultra-high capacity
- Charge 2 or 4 pieces of NiMH AA or 2 pieces of NiMH AAA
- Safety timer
- Trickle charge after full charge
- 1 x dual color LED indicator
- Safety guaranteed
- Environmentally friendlier



4 x 2300 series AA



4 x 2100 series AA



4 x 1800 mAh AA

Quick



- 8-hour quick charger
- Safety timer
- 8 hours to fully charge 4 pieces of batteries
- High drain performance
- Charge 2 or 4 pieces of NiMH / NiCd AA or AAA
- Safety timer
- Trickle charge after full charge
- 2 x dual color LED indicator
- Safety guaranteed
- Environmentally friendlier



4 x 2000 series AA




4 x 1800 mAh AA



4 x 1600 mAh AA

Standard Series

Nite-lite

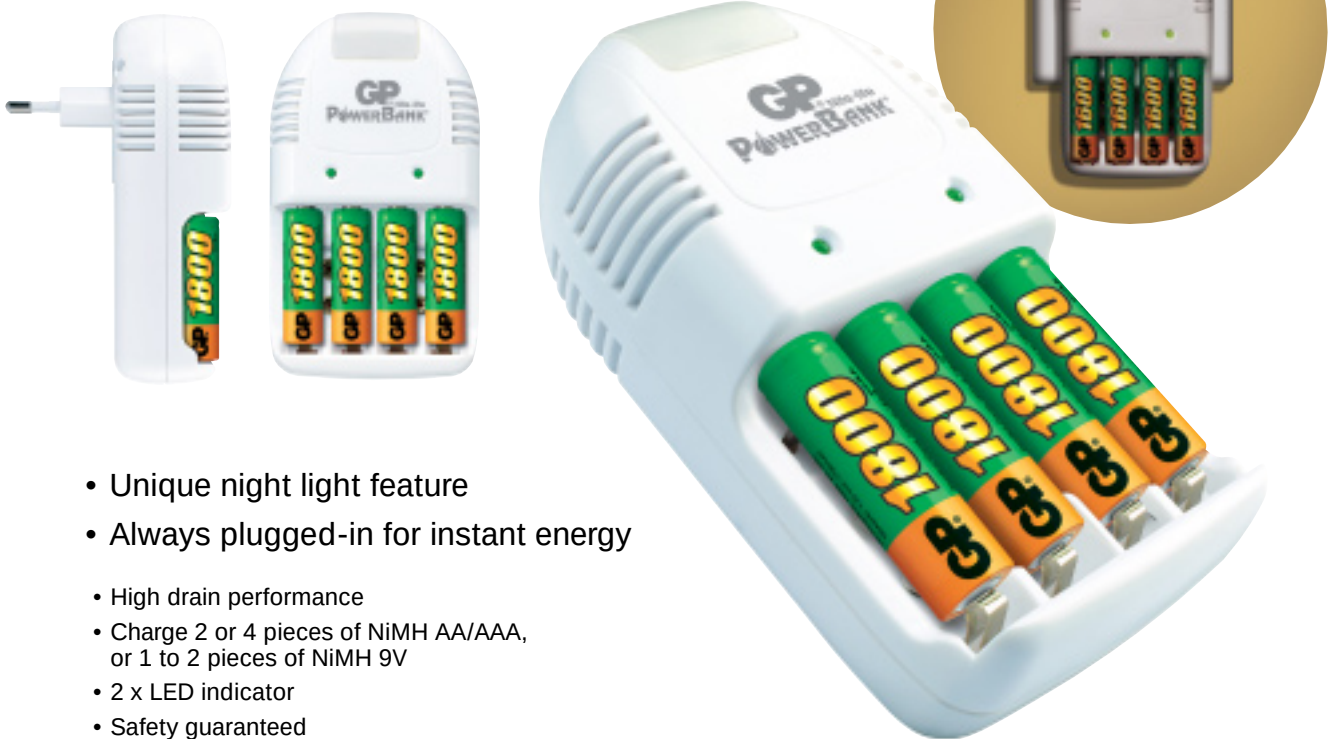

- Unique night light feature
- Always plugged-in for instant energy
- High drain performance
- Charge 2 or 4 pieces of NiMH AA/AAA, or 1 to 2 pieces of NiMH 9V
- 2 x LED indicator
- Safety guaranteed
- Great savings
- Environmentally friendlier



4 x 2100 series AA



4 x 1800 mAh AA



4 x 1600 mAh AA

GP PowerBank



PowerBank II & 3



- Unique design
- Always plugged-in for instant energy
- Safety timer
- High drain performance
- Charge 2 or 4 pieces of NiMH AA, or 2 pieces of NiMH AAA
- Trickle charge after full charge
- 2 x dual color LED indicator
- Safety guaranteed
- Great savings
- Environmentally friendlier



4 x 2100 series AA



4 x 1800 mAh AA



4 x 1600 mAh AA

Standard Series



PowerBank



- Always plugged-in for instant energy
- Charge 2 or 4 pieces of NiMH AA / AAA
- High drain performance
- 2 x LED indicator
- Safety guaranteed
- Great savings
- Environmentally friendlier



4 x 1800 mAh AA



4 x 1600 mAh AA



4 x 2100 series AA



4 x 1300 mAh AA



4 x 800 mAh AAA



8 x 1300 mAh AA

PowerBank with 4 x 600 mAh AAA is also available.

GP PowerBank

Mini



- Always plugged-in for instant energy
- Charge 1 or 2 pieces of NiMH AA/AAA
- High drain performance
- 2 x LED indicator
- Safety guaranteed
- Great savings
- Environmentally friendlier



4 x 1300 mAh AA



2 x 1300 mAh AA



4 x 800 mAh AAA



2 x 800 mAh AAA



4 x 600 mAh AAA



2 x 600 mAh AAA

Standard Series



USB

- Innovative design
- Convenience & mobility
- Charge NiMH AA with USB cable via computer
- 6 to 7 hours to fully charge 4 pieces of batteries
- Powered by computer with USB plug
- Charge 2 or 4 pieces of NiMH AA
- 2 x LED indicator
- Safety guaranteed
- Great savings
- Environmentally friendlier



4 x 1800 mAh AA



4 x 1600 mAh AA

Universal



- Universal for household use
- Charge all sizes of batteries
- Automatic charging current selection
- Charge 2 or 4 pieces of NiMH AA, AAA, C, D batteries or 1 to 2 pieces of 9V
- 3 x LED indicator
- Safety guaranteed
- Great savings
- Environmentally friendlier



Batteries are not included

Specialty Series

Torch 4-in-1



- Innovative multi-purpose PowerBank
- Emergency light function
- Night light function
- Built-in LED torch



- Charge 4 pieces of NiMH AA
- 1 x LED indicator
- Always plugged-in for instant energy
- Safety guaranteed
- Great savings
- Environmentally friendlier



PowerBank



Emergency
Light



Night
Light



LED
Torch



4 x 2100 series AA



4 x 2000 series AA



4 x 1800 mAh AA



4 x 1300 mAh AA



Specialty



- Specially designed for 9V batteries
- Charge 1 to 2 pieces of NiMH 9V
- 2 x LED indicator
- Safety guaranteed
- Great savings
- Environmentally friendlier

Audio



- Specially designed for audio appliances
- 2 hours to fully charge 1 piece of battery
- 4 hours to fully charge 2 pieces of batteries
- Charge 1 or 2 pieces of NiMH prismatic or AA
- Safety termination
 - * Minus delta voltage (-dV)
 - * Safety timer
- Trickle charge after full charge
- Damaged battery detection
- Alkaline and other primary batteries detection
- 2 x dual color LED indicator
- Safety guaranteed
- Environmentally friendlier



2 x 170 mAh 8.4V



2 x 170 mAh 7.2V



2 x 1450 mAh Prismatic



2 x 1400 mAh Prismatic

GP® Rechargeable Batteries

AA

High Capacity Series

2300 series



230AAHC-U2 1.2V



230AAHC-U4 1.2V

2100 series



210AAHC-U2 1.2V



210AAHC-U4 1.2V

2000 series



200AAHC-U2 1.2V



200AAHC-U4 1.2V

1800 mAh



180AAHC-U2 1.2V



180AAHC-U4 1.2V

Standard Series

1600 mAh



160AAHC-U2 1.2V



160AAHC-U4 1.2V

1300 mAh



130AAHC-U2 1.2V



130AAHC-U4 1.2V

AAA

High Capacity Series

850 mAh



85AAAHC-U2 1.2V



85AAAHC-U4 1.2V

800 mAh



80AAAHC-U2 1.2V



80AAAHC-U4 1.2V

750 mAh



75AAAHC-U2 1.2V



75AAAHC-U4 1.2V

Standard Series

700 mAh



70AAAHC-U2 1.2V



70AAAHC-U4 1.2V

650 mAh



65AAAHC-U2 1.2V



65AAAHC-U4 1.2V

600 mAh



60AAAHC-U2 1.2V



60AAAHC-U4 1.2V

GP® Rechargeable Batteries

C D

High Capacity Series

4000 mAh



400CHC-U2 1.2V

9000 mAh



900DHC-U2 1.2V

7000 mAh



700DHC-U2 1.2V

3500 mAh



350CHC-U2 1.2V

4500 mAh



450DHC-U2 1.2V

Standard Series

2200 mAh



220CH-U2 1.2V

2200 mAh



220DH-U2 1.2V

9V P_{rismatic}

Standard Series

170 mAh-7.2V



17R7H-U1 7.2V

1450 mAh



14M145-U1 1.2V



14M145-U2 1.2V

170 mAh-8.4V



17R8H-U1 8.4V

1400 mAh



14M-U1 1.2V



14M-U2 1.2V

Specifications

GP PowerBank – Premium Series



	PowerBank U-Smart	PowerBank Smart 2	PowerBank Travel	PowerBank Rapid 2
Model Number	GPPB13	GPPB14	GPPB03	GPPB16
Charging Time	~30 mins	~1 hour	2-5 hours	2-5 hours
Charging Channel	4 Channels	4 Channels	4 Channels	2 Channels
Configuration	Corded Type	Corded Type	Corded Type	Plug-in Type
Input Voltage	100-240V AC 50/60Hz 12V DC	100-240V AC 50/60Hz 12V DC	100-240V AC 50/60Hz 12V DC	100-240V AC 50/60Hz
Output Voltage	DC 12V 2.5A	DC 12V 1.5A	DC 1.6V 2050mA	DC 3.2V 1050mA
Battery Type	NiMH	NiMH/NiCd	NiMH	NiMH
Battery Size	AA/AAA	AA/AAA	AA/AAA	AA/AAA
Car Charging Function	√	√	√	-
Charging Current				
- AA	NiMH - 3400mA	NiMH - 2000mA NiCd - 1000mA	1-2 pcs - 1025mA 3 pcs - 683mA 4 pcs - 512mA	2 pcs - 1050mA 4 pcs - 525mA
- AAA	NiMH - 1700mA	NiMH - 1000mA NiCd - 400mA	1 - 2 pcs - 400mA	2 pcs - 525mA
Trickle Charge	√	√	√	√
Termination Method				
- Minus Delta Voltage (-dV)	Individual	Individual	Individual	√
- Safety Timer	Individual	Individual	Individual	√
- Temperature Protection	Individual	Individual	√	√
- Alkaline Battery Detection	√	√	√	√
- Damaged Battery Detection	√	√	√	√
LED Indicator	Dual Color x 4	Red x 4	Dual Color x 1	Dual Color x 1
Safety Approval	CE/GS/UL/FCC/SAA/ e-Mark	CE/GS/UL/FCC/ SAA/e-Mark	CE/GS/UL/e-Mark	CE/GS/UL
Dimension (L) x (W) x (T) mm	120 x 74 x 47	119.5 x 85 x 31.5	108.3 x 66.3 x 28.7	115.5 x 69.5 x 31.9

GP PowerBank – Mid-Range Series



	PowerBank Quick 2	PowerBank Quick
Model Number	GPPB17	GPKB34P
Charging Time	~6 hours	NiMH ~8 hours NiCd ~3 hours
Charging Channel	2 Channels	2 Channels
Configuration	Plug-in Type	Plug-in Type
Input Voltage	100-240V AC 50/60Hz	230V AC 50Hz (GS/BS) 120V AC 60Hz (UL)
Output Voltage	DC 2.8V	DC 3V
Battery Type	NiMH	NiMH/NiCd
Battery Size	AA/AAA	AA/AAA
Charging Current		
- AA	360mA	250mA
- AAA	160mA	100mA
Trickle Charge	√	√
Termination Method		
- Minus Delta Voltage (-dV)	-	-
- Safety Timer	√	√
- Temperature Protection	-	-
- Alkaline Battery Detection	-	-
- Damaged Battery Detection	-	-
LED Indicator	Dual Color x 1	Dual Color x 2
Safety Approval	CE/GS/UL	CE/GS/UL
Dimension (L) x (W) x (T) mm	119 x 79.8 x 32	127 x 72 x 45

Specifications

GP PowerBank – Standard Series



	PowerBank Nite-lite	PowerBank II	PowerBank 3	PowerBank	PowerBank I	Mini PowerBank
Model Number	GPPB11	GPPB05	GPPB04	GPKB01	GPPB08	GPKB02
Charging Time	~16 hours	16 hours	18 hours	~16 hours	~16 hours	~16 hours
Charging Channel	2 Channels	2 Channels	2 Channels	2 Channels	2 Channels	2 Channels
Configuration	Plug-in Type UL plug Foldable	Plug-in Type	Plug-in Type	Plug-in Type	Plug-in Type	Plug-in Type
Input Voltage	230V AC 50Hz (GS/BS) 120V AC 60Hz (UL)	230V AC 50Hz (GS/BS) 120V AC 60Hz (UL)	230V AC 50Hz (GS/BS) 120V AC 60Hz (UL)	230V AC 50Hz (GS/BS) 120V AC 60Hz (UL)	230V AC 50Hz (GS/BS) 120V AC 60Hz (UL)	230V AC 50Hz (GS/BS) 120V AC 60Hz (UL)
Output Voltage	DC 2.8V (AA/AAA) DC 9V (9V)	DC 2.8V	DC 2.8V	DC 2.8V	DC 2.8V	DC 1.4V
Battery Type	NiMH	NiMH	NiMH	NiMH	NiMH	NiMH
Battery Size	AA/AAA/9V	AA/AAA	AA/AAA	AA/AAA	AA/AAA	AA/AAA
Charging Current						
- AA NiMH	130mA	130mA	130mA	100mA	100mA	100mA
- AAA NiMH	70mA	52mA	52mA	45mA	45mA	45mA
- 9V NiMH	17mA	-	-	-	-	-
Trickle Charge	-	√	√	-	-	-
Termination Method						
- Minus Delta Voltage (-dV)	-	-	-	-	-	-
- Safety Timer	-	√	√	-	-	-
- Temperature Protection	-	-	-	-	-	-
- Alkaline Battery Detection	-	-	-	-	-	-
- Damaged Battery Detection	-	-	-	-	-	-
LED Indicator	Green x 2	Dual Color x 2	Dual Color x 2	Green x 2	Green x 2	Green x 2
Safety Approval	CE/GS/UL	CE/GS/UL/SAA	CE/GS/UL	CE/GS/UL/SAA/CSA	CE/GS/UL	CE/GS/UL
Dimension (L) x (W) x (T) mm	130 x 75 x 40.5	123 x 82.5 x 32	123 x 82.5 x 32	118 x 75 x 40	118 x 75 x 40	105 x 40 x 35.5



	PowerBank USB	PowerBank Universal
Model Number	GPPB10	GPPB19
Charging Time	~7 hours	D: 2200mAh ~ 5 hours; 7000mAh ~16 hours C: 2200mAh ~ 5 hours; 3500mAh ~10 hours AA: 1300mAh ~ 5 hours; 2000 series ~10 hours AAA: 600mAh ~ 5 hours; 800mAh ~ 9 hours 9V: 170mAh ~ 16 hours
Charging Channel	2 Channels	2 Channels
Configuration	Charge with USB cord with computer	Corded Type
Input Voltage	DC 5V	230V AC 50Hz (GS/BS) 120V AC 60Hz (UL)
Output Voltage	DC 2.8V	D/C/AA/AAA: DC 2.8V 9V: DC 9V
Battery Type	NiMH	NiMH
Battery Size	AA	D/C/AA/AAA/9V
Charging Current		
- D NiMH	-	560mA
- C NiMH	-	440mA
- AA NiMH	300mA	260mA
- AAA NiMH	-	120mA
- 9V NiMH	-	14mA
Trickle Charge	-	-
Termination Method		
- Minus Delta Voltage (-dV)	-	-
- Safety Timer	-	-
- Temperature Protection	-	-
- Alkaline Battery Detection	-	-
- Damaged Battery Detection	-	-
LED Indicator	Green x 2	2 Green for 2 Channels; 1 Green for 9V
Safety Approval	CE	CE/GS/UL/FCC
Dimension (L) x (W) x (T) mm	109 x 93 x 33.3	178 x 94 x 60

Specifications

GP PowerBank – Specialty Series



	PowerBank Specialty	PowerBank Audio	PowerBank Torch 4-in-1
Model Number	GPPB09	GPPB12	GPPB18
Charging Time	~10 hours	1 pc ~2 hours 2 pcs ~4 hours	~12.5 hours
Charging Channel	2 Channels	1 Channel	1 Channel
Configuration	Plug-in Type	Plug-in Type	Plug-in Type
Input Voltage	230V AC 50Hz (GS/BS) 120V AC 60Hz (UL)	230V AC 50Hz (GS/BS) 120V AC 60Hz (UL)	230V AC 50Hz (GS/BS) 120V AC 60Hz (UL)
Output Voltage	DC 9.8V	DC 2.8V	DC 5.6V 250mA
Battery Type	NiMH	NiMH	NiMH
Battery Size	9V	Prismatic (14M)/AA	AA
Charging Current			
- D NiMH	-	-	-
- C NiMH	-	-	-
- AA NiMH	-	700mA	250mA (Rated)
- AAA NiMH	-	-	-
- 9V NiMH	24mA	-	-
- Prismatic NiMH (14M)	-	700mA	-
Trickle Charge	-	√	-
Termination Method			
- Minus Delta Voltage (-dV)	-	√	-
- Safety Timer	-	√	-
- Temperature Protection	-	-	-
- Alkaline Battery Detection	-	√	-
- Damaged Battery Detection	-	√	-
LED Indicator	Green x 2	Dual Colour x 2	Green x 1
Safety Approval	CE/GS/UL	CE/GS/UL	CE/GS/UL
Dimension (L) x (W) x (T) mm	98.6 x 66.2 x 60.0	127 x 82 x 42.6	198 x 53.5 x 34

GP® Rechargeable Batteries



Cell Size	Model No.	Nominal Voltage (V)	Capacity (0.2C discharge)*(mAh)		Nominal Dimension (mm)		Weight (g)	Standard Charge		1 Hr Charge
			Minimum	Typical	Diameter	Height		Current (mA)	Time (Hour)	Current (mA)#

High Capacity Series

AAA	85AAAHC	1.2	830	850	10.5	44.5	15	85	16	850
	80AAAHC**	1.2	780	800	10.5	44.5	14	80	16	800
	75AAAHC**	1.2	730	750	10.5	44.5	13	75	16	750
AA	230AAHC**	1.2	2200	2250	14.5	50.5	29.5	220	16	2200
	210AAHC**	1.2	2000	2050	14.5	50.5	28	200	16	2000
	200AAHC**	1.2	1900	1950	14.5	50.5	27	190	16	1900
	180AAHC**	1.2	1750	1800	14.5	50.5	26	180	16	1800
C	400CHC	1.2	3880	4000	26.2	50	82	400	16	N/A
	350CHC	1.2	3480	3500	26.2	50	78.5	350	16	N/A
D	900DHC	1.2	8750	9000	34.2	61.5	173	900	16	N/A
	700DHC	1.2	6800	7000	34.2	61.5	170	700	16	N/A
	450DHC	1.2	4400	4500	34.2	61.5	130	450	16	N/A

Standard Series

AAA	70AAAHC**	1.2	680	700	10.5	44.5	12.2	70	16	700
	65AAAHC	1.2	630	650	10.5	44.5	13	65	16	650
	60AAAHC**	1.2	600	630	10.5	44.5	13	60	16	600
AA	160AAHC**	1.2	1550	1600	14.5	50.5	26	160	16	1600
	130AAHC**	1.2	1250	1300	14.5	50.5	26	130	16	1300
C	220CH	1.2	2150	2200	26.2	50	61	220	16	N/A
D	220DH	1.2	2150	2200	34.2	61.5	71	220	16	N/A

9V Series

9V	17R8H**	8.4	170	175	15.7(T) x 26.5(W) x 48.5(H)		32	17	16	170
	17R7H**	7.2	170	175	15.7(T) x 26.5(W) x 48.5(H)		28	17	16	170

Prismatic Series

Prismatic	14M145**	1.2	1350	1450	6.1(T) x 17.0(W) x 67.0(H)		25	135	16	1350
	14M**	1.2	1250	1400	6.1(T) x 17.0(W) x 67.0(H)		23	125	16	1250

One hour rate with charge termination control. * After charging at 0.1C for 16 hours. ** With UL approval.



WORLDWIDE HEADQUARTERS
Hong Kong
GPI International Limited

8/F., Gold Peak Building, 30 Kwai Wing Road, Kwai Chung, N.T., Hong Kong
Tel : (852) 2484 3333 Fax : (852) 2480 5912
E-mail address : gpil@goldpeak.com Website : <http://www.gpbatteries.com.hk>

SALES AND MARKETING BRANCH OFFICES

ASEAN

GP BATTERY MARKETING (SINGAPORE) PTE. LIMITED
97 Pioneer Road, Singapore 639579
Tel: (65) 6559 9760 Fax: (65) 6559 9761

MALAYSIA

GP BATTERY MARKETING (MALAYSIA) SDN. BHD.
Lot 8, Jalan Pemberita
U1/49, Temasya Industrial Park,
40150 Shah Alam, Selangor Darul Ehsan, Malaysia
Tel: (60) 3 5569 3499 Fax: (60) 3 5569 3498

THAILAND

GP BATTERY MARKETING (THAILAND) CO., LIMITED
3/F., V.H. Commercial Building,
23/1 Soi Ngamwongwan 9, Ngamwongwan Road,
Bangkhen Muang, Nonthaburi 11000, Thailand
Tel: (66) 2 952 5323/4/5 Fax: (66) 2 952 5322

TAIWAN

GOLD PEAK INDUSTRIES (TAIWAN) LIMITED - TAIPEI OFFICE
Room 1200, International Trade Building, No.205 Sec.1,
Tun Hua South Road, Taipei 10647, Taiwan R.O.C.
Tel: (886) 2 2741 4919 Fax: (886) 2 2731 4868

CHINA

HUIZHOU CHAO BA BATTERY TECHNOLOGY CO., LTD
2/F., South of Hongye Industrial Building,
Tianluo Mountain, 14th Industrial District,
Huizhou City, Guangdong, China
(Postal Code: 516003)
Tel: (86) 752 282 8428 Fax: (86) 752 280 2872

HONG KONG

GP BATTERY MARKETING (H.K.) LIMITED
8/F., Gold Peak Building, 30 Kwai Wing Road,
Kwai Chung, N.T., Hong Kong
Tel: (852) 2420 0281 Fax: (852) 2494 9349

KOREA

GP BATTERY MARKETING (KOREA) LIMITED
4/F., Kunsul Hoekwan Building, 71-2 Non Hyun-Dong,
Kang Nam-Gu, Seoul, South Korea
Tel: (82) 2 549 7188/9, (82) 2 516 3936/7
Fax: (82) 2 514 0623, (82) 2 516 0621

U.S.A

GOLD PEAK INDUSTRIES (NORTH AMERICA), INC.
11235 West Bernardo Court, San Diego,
CA 92127-1638, U.S.A.
Tel: (1) 858 674 6099 Fax: (1) 858 674 6496

CANADA

GP BATTERY MARKETING INC.
Unit 7, 7780 Woodbine Avenue, Markham,
Ontario, Canada L3R 2N7
Tel: (1) 905 474 9507 Fax: (1) 905 474 9452

LATIN AMERICA

GP BATTERY MARKETING (LATIN AMERICA) INC.
8370 NW, 66TH Street, Miami, Florida 33166, U.S.A.
Tel: (1) 305 471 7717 Fax: (1) 305 471 7718

EUROPE

GP BATTERY MARKETING (EUROPE) S.A.
75 Zae Du Trou Grillon,
91280 St Pierre Du Perray, Paris, France
Tel: (33) 1 6989 6200 Fax: (33) 1 6989 6221

GERMANY

GP BATTERY MARKETING (GERMANY) GMBH
Niederlöricker Str. 62, D-40667 Meerbusch, Germany
Tel: (49) 2132 971504/5/6 Fax: (49) 2132 80145

POLAND

GP BATTERY (POLAND) SPÓŁKA Z O.O.
uL. Słowicza 19, 02-170 Warszawa, Poland
Tel: (48) 22 868 0490 Fax: (48) 22 846 7535

U.K.

GP BATTERIES (U.K.) LIMITED
Summerfield Avenue, Chelston Business Park,
Wellington, Somerset, TA21 9JF, U.K.
Tel: (44) 1 823 660 044 Fax: (44) 1 823 665 595

ITALY

GP BATTERY MARKETING ITALY S.R.L.
Via A. Volta. 3 Assago-MI-Italy
Tel: (39) 02 488 2512 Fax: (39) 02 488 2865

SCANDINAVIA

GPBM NORDIC AB
Grimboåsen 5, 417 49 Gothenburg, Sweden
Tel: (46) 31 558 600 Fax: (46) 31 556 813